

# M123R-□-N M123R-□-P SERIES



## ORDERING INFORMATION



**M 1 2 3 R - P U R - 2 M - P**


<b>CIRCUIT</b>	P:with LED,PNP circuit N:with LED,NPN circuit
<b>CABLE LENGTH</b>	2M: 2 Meters 5M: 5 Meters
<b>CABLE MATERIAL</b>	PVC: $\phi$ 5 PVC cable PUR: $\phi$ 5 PUR cable
<b>TYPE OF CONNECTOR</b>	R:Female,Straight cable socket RL:Female,Angle cable socket
<b>CONNECTOR SERIES</b>	M123: M12 3Pin connector

## SPECIFICATIONS



TYPE	M123R-□-N M123RL-□-N	M123R-□-P M123RL-□-P
FEMALE PINOUT		
CHARACTERISTICS	<p>1:Brown 2:N/C( NO connect) 3:Blue 4:Black 5:N/C( NO connect)</p>	
Conductor Colors		
Number Of Contacts	3	
Rated Voltage	10-30V AC/DC	
Rated Current	4A	
Contact Material	Gold plated brass	
Contact Bearer Material	PU	
Housing Material	PU	
Housing Color	Transparent	
Cable Material	PVC	PUR
Cable Color	Black	
Cable Conductor	22AWG	
Circuit	NPN	PNP
Led Color	Power :Green LED / Switch state:Yellow LED	
Protection Class(IEC60529)	IP67	
Temperature Range	-20~80°C	

## DIMENSIONS

M123R-N/M123R-P

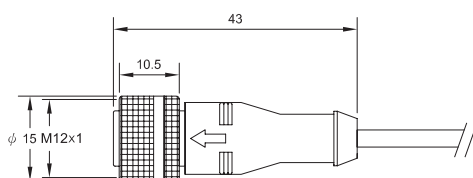

M123RL-N/M123RL-P

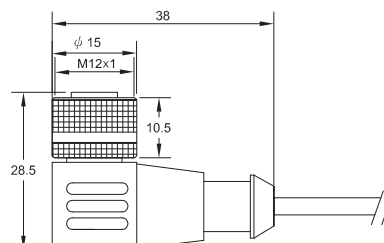

Unit:mm