

## Ordering Information

**K M 8 3 R - P U R - 2 M**



### Cable Length

2M : 2 Meters  
5M : 5 Meters

### Type of Connector

R : Female, Straight cable socket  
RL : Female, Angle cable socket







### Cable material

PVC : Ø4.5 PVC cable  
PUR : Ø4.5 PUR cable

### Connector Series


KM83 : M8 3Pin connector  
KM84 : M8 4Pin connector

## Specifications


MODEL	KM83R -  KM83RL - 		KM84R -  KM84RL - 	
Female Pinout				
Characteristics				
Conductor Colors	1 : Brown 3 : Blue 4 : Black		1 : Brown 2 : White 3 : Blue 4 : Black	
Number Of Contacts	3		4	
Rated Voltage	60 V AC / DC			
Rated Current	3 A			
Contact Material	Gold plated brass			
Contact Bearer Material	PC + ABS			
Housing Material	TPV			
Housing Color	Black			
Cable Material	PVC	PUR	PVC	PUR
Cable Color	Gray	Black	Gray	Black
Cable Conductor	24 AWG ( 0.22mm <sup>2</sup> )			
Circuit	-			
Led Color	-			
Protection Class ( IEC60529 )	IP67			
Temperature Range	-20 ~ 80 °C			

## Dimensions

### ■ KM83R / KM84R

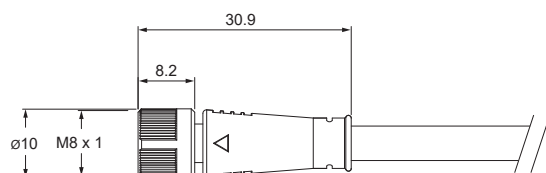

### ■ KM83RL / KM84RL

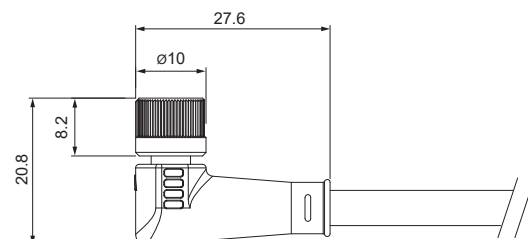

Unit : mm